


TELESCOPIC SPREADER (SHACKLES NOT SHOWN) (U27000A-1PA)

Cage Code: 65059 | Drawing No: SU27000A | Revision: A | Sheet: 1 of 1

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
SEE ELECTRONIC PARTS LIST FOR BILL OF MATERIALS
DO NOT SCALE DRAWING

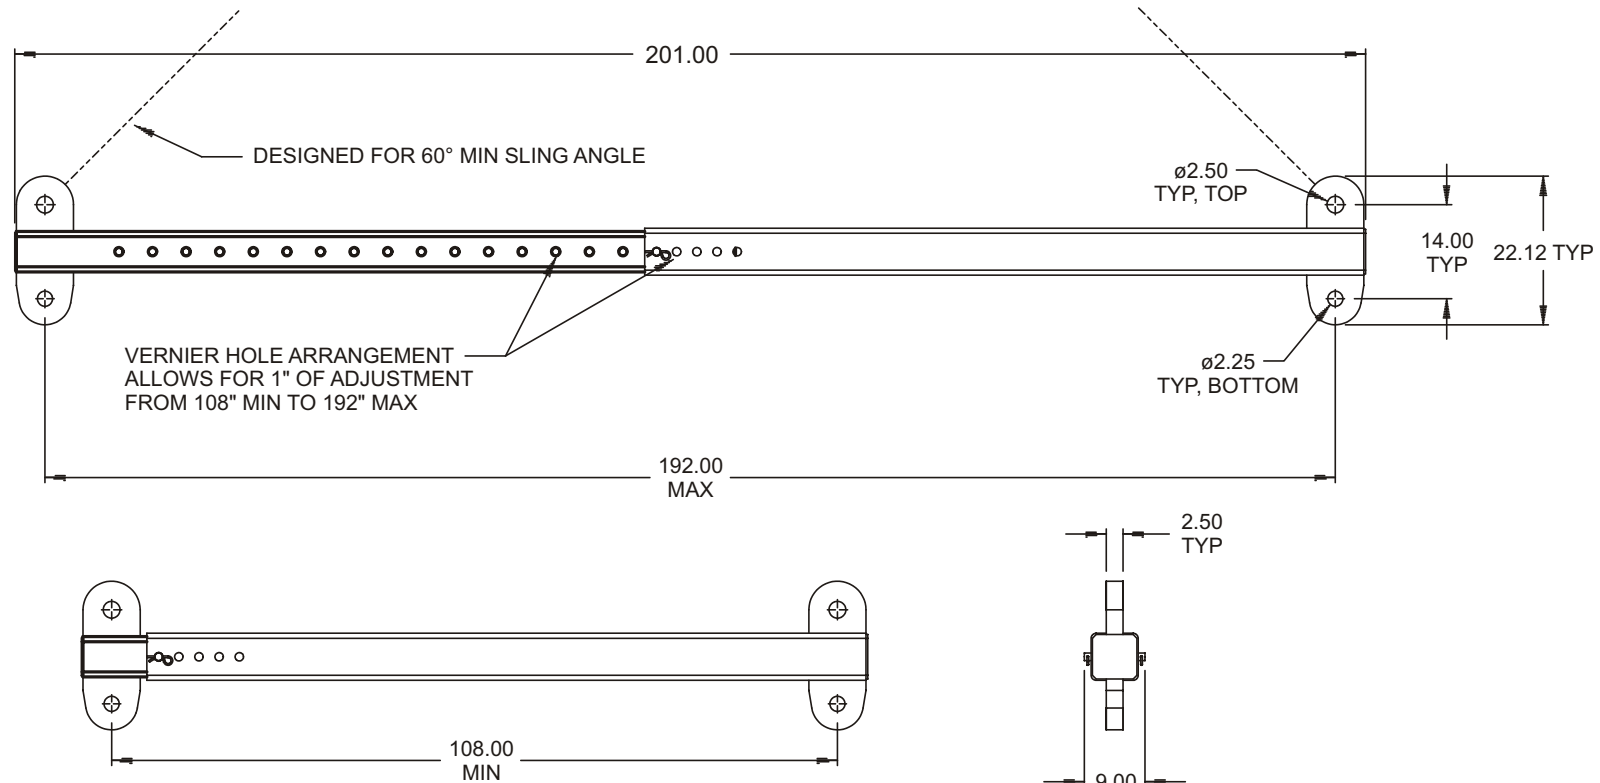

NOTES:

1. P/N: U27000A-1PA, TELESCOPIC SPREADER (SHACKLES NOT SHOWN)
2. WLL: 50 TONS (100,000 LB)
3. PROOF TESTED TO 125% (125,000 LB) AND CERTIFIED
4. FINISH: SANDBLAST, PRIME AND PAINT SAFETY YELLOW
5. CALCULATED WEIGHT: 765 LB. (BEAM ONLY)
6. INCLUDES QTY: 2, 35 TON SHACKLES, AND QTY: 2, 25 TON SHACKLES.

REVISIONS		DATE	APPROVED
REV	DESCRIPTION		
A	CHANGED MIN SLING ANGLE FROM 45° TO 60°	07-01-04	W.D.D.

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: info@tandemloc.com • www.tandemloc.com
824 Highway 101 • Havelock, NC 28532
TEL: 1.800.258.7324 (252.447.7155)
FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.

Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.